


DVD 5/9 Label Art Specification Printable Area Shaded in Gray

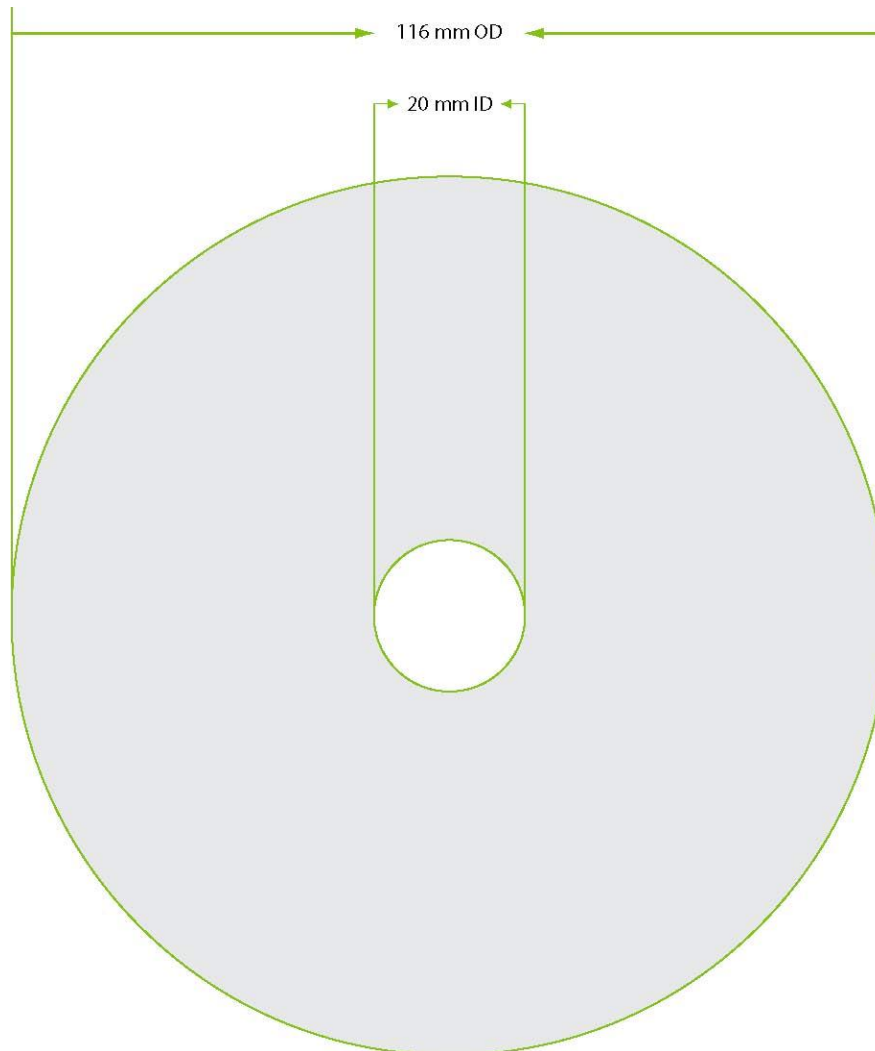

Quick Reference Labelart Specifications and Design Tips

- | | |
|--|---|
| <ul style="list-style-type: none"> ○ The shaded area of the template above represents the printable area. Do not deviate from the printable area. ○ Minimum font point size: 6 pt. San Serif Font (ex. Helvetica) ○ Minimum line width: 0.5 pt. ○ Minimum line width knockout/reversed: 1.0 pt. ○ Collect for output, all graphic elements (links) and fonts (printer and screen). Include sub-ordinate fonts used in linked graphic elements. ○ Technicolor will trap your electronic files. If submitting film, apply a 0.35 pt. trap to all colors where registration is critical. ○ Indicate all colors required. This includes white floods or custom white. | <ul style="list-style-type: none"> ○ Specify all knockout elements and their final appearance. This will ensure Technicolor meets your desired finished product. ○ Color-accurate proofs are required to ensure color and content accuracy. ○ Image resolution (raster images) of 300 dpi or higher is required to ensure image quality. Re-link to your hi-resolution images when using FPOs. ○ Technicolor respects all color profiles embedded in your design. ○ Bleeds are encouraged when designing in Adobe Illustrator. Final masking and film/file output will take place within Adobe InDesign or QuarkXpress. Note: Do not create bleeds if designing fully using Adobe InDesign or QuarkXpress. |
|--|---|